

SRS-M 4A

SRS-M 7A

Monofazni regulatori brzine
autotransformatora

Single phase tranformer
speed regulators

OPIS

Varijatori napona, ručni sa autotransformatorom sa unapred podešenim 5-brzinskim biračem. Nema električnog brujanja u motoru. Pogodno za podesive jednofazne asinhronne motor.

TEHNIČKE KARAKTERISTIKE

Napajanje 230V-1Ph-50 / 60Hz.

Nominalna struja

SRS M-4A mak 4A / SRS M-7A mak 7A

Indikator rada.

Kontejner od aluminijuma obojenog epoksidom.

IP55 zaštita.

Radna temperatura -15 ° C + 50 ° C.



Težina 5/8 kg

DESCRIPTION

Manual voltage converter by transformer selector, 5 step options. Minimum magneto hum in the motor. Suitable for single phase asynchronous speed adjustable motors.


TECHNICAL SPECIFICATIONS

- Supply 230V-1Ph-50/60Hz
- Rated current:
SRS M-4A max 4A / SRS M-7A max 7A
- Pilot lighth.
- Housing epoxy painted aluminum.
- Protection IP55.
- Operating temperature -15°C + 50°C.
- Weight 5 / 8 Kg.

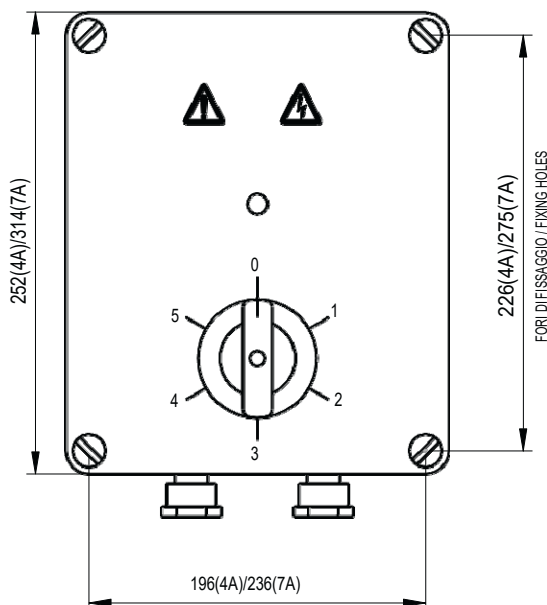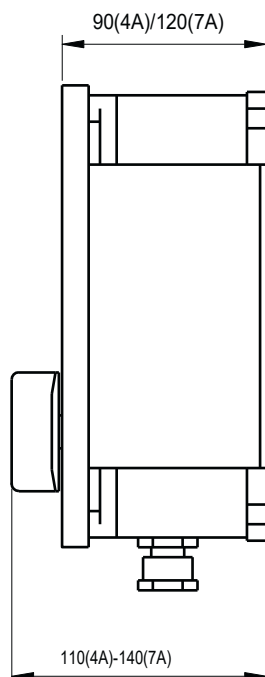

FIKSNE RUPE / FIXING HOLES

SCHEMA
COLLEGAMENTO
WIRING DIAGRAM

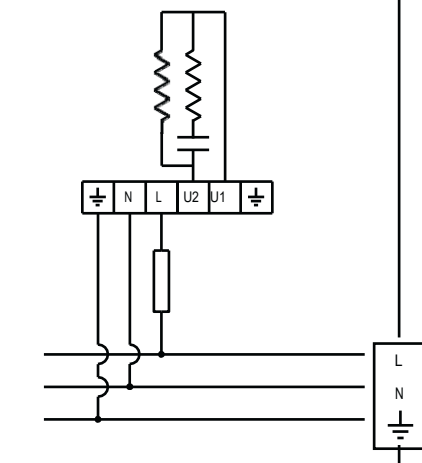

NAPAJANJE / SUPPLY: 230V-1Ph-50/60H

SRS-T 2A SRS-T 4A SRS-T 7A

Trofazni regulatori brzine autotransformatora

Three phase transformer speed regulators

OPIS

Varijatori napona, ručni sa autotransformatorom sa unapred podešenim 5-brzinskim biračem (3 za 2A). Nema električnog brujanja u motoru. Pogodno za podesive trofazne asinhronne motore.

TEHNIČKE KARAKTERISTIKE

Napajanje 400V-3Ph-50 / 60Hz.

Nominalna struja
SRS T-2A mak 2A
SRS T-4A mak 4A
SRS T-7A mak 7A

Indikator rada.

Kontejner od aluminijuma obojenog epoksidom.

IP55 zaštita.

Radna temperatura -15 ° C + 50 ° C.


Težina 5/11/20 kg

DESCRIPTION

Manual voltage variator by self-transformer selector, 5 step options (3 for the 2A version). Minimum magneto hum in the motor. Suitable for three phase asynchronous speed adjustable motors.

TECHNICAL SPECIFICATIONS

- Supply 400V-3Ph-50/60Hz
- Rated current:
SRS T-2A max 2A
SRS T-4A max 4A
SRS T-7A max 7A
- Pilot lighth.
- Housing in epoxy painted aluminum.
- Protection IP55.
- Operating temperature -15°C + 50°C.
- Weight 5/11/20 kg

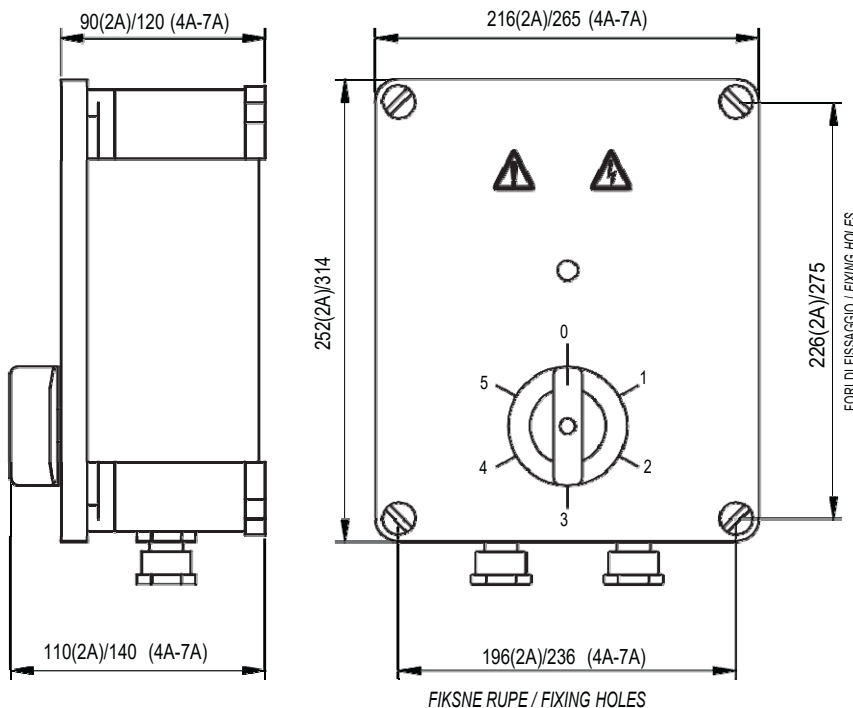

ŠEMA OŽIČENJA

WIRING DIAGRAM

